

# Model 2

## Application

- Post-Mix Equipment

## BevXpress™ Water Filtration Systems

Spec No. \_\_\_\_\_

Quantity \_\_\_\_\_



**Model 2**

## Product Features

- ◆ Built-in prefilter extends life of downstream cartridges, lowering operating costs.
- ◆ Unibody manifold provides high flow rates and high gallon capacities.
- ◆ SQC™ - Sanitary Quick Change encapsulated design reduces contamination during change-outs and are disposable and incinerable.
- ◆ Pressure gauge with red follower needle allows the filter pressure to be monitored and indicates when the cartridges are reaching the end of their service life.
- ◆ FDA CFR-21 and/or NSF compliant materials provides peace of mind that this product is suitable for potable applications.

The BevXpress™ Model 2 water filtration systems are designed to reduce the effects of poor water quality by maintaining product consistency and efficiency in higher volume post-mix systems. The Model 2 water filtration systems reduce sediment particles that can cause beverages to be cloudy and unappealing while protecting the downstream equipment. Premium activated carbon reduces chlorine taste and odor so beverages can maintain proper flavor. Three filtration media technologies address varying water conditions.

## Product Specifications

Model Number	Part Number	Reduction Claims	Micron Rating	Capacity	Service Flow Rate	Application	Replacement Cartridge	Qty	Sizing
Model 2	55837-01	Sediment, Chlorine	1	20,000 gallons (75,708 liters)	3 gpm (11.4 lpm)	Standard Water	CFS8504-A	1	Medium Volume
							CFS8112	2	
Model 2C	55837-05	Sediment, Chlorine, Cyst	0.5	18,000 gallons (68,137 liters)		Cyst	CFS8504-A	1	
							CFS8812X	2	
Model 2P	55837-06	Sediment, Chlorine	5	9,600 gallons (36,340 liters)		High Turbidity	CFS8504-A	1	Low Volume
							CFS8720	2	



Visit [www.nsf.org](http://www.nsf.org) for the claims associated with products that are NSF listed.



**Water Filter Systems**  
**Foodservice**


# Model 2 BevXpress™ Water Filtration Systems

Spec No. \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 Model Number \_\_\_\_\_  
 Part Number \_\_\_\_\_

## Physical Specifications:

- System to incorporate a unibody manifold design.
- System to incorporate a 10" or 20" prefilter housing with positive piston seal and built-in shut-off valve.
- System to incorporate a uniform density prefilter.
- System to include integral flush valve and outlet pressure gauge with follower needle.
- System inlet and outlet plumbing connections to be 1/2" NPT.
- System to be manufactured from FDA CFR-21 and/or NSF compliant materials.
- System to carry an NSF Performance Data Sheet (PDS)\*.
- Filter cartridges to be non-activation type.
- Post-filter cartridges to be double o-ring seal type.
- Post-filter cartridges to incorporate a graded density, multi-composite carbon block or granular activated carbon.
- System to have a maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (38°C).
- Post-filter cartridges to be sanitary in design requiring no contact with the filter media during cartridge change-out.
- Each system to have a \_\_\_\_\_ micron nominal particle reduction capability.
- Each system will reduce chlorine taste and odor for \_\_\_\_\_ gallons (liters).
- System to have a service flow rate of 3 gpm (11.4 lpm).

\* For NSF listed products.

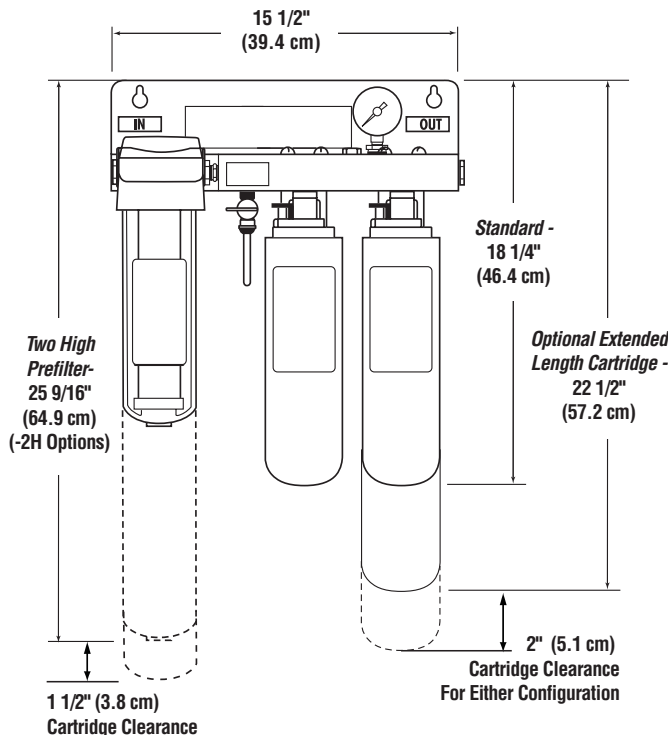

## Installation Tips:

- Shut off downstream equipment prior to installation of the system.
- Do not exceed operating parameters for temperature or pressure.
- Do not install outdoors.
- For cold water use only.
- For commercial use only.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment Number 070595-CT-001.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold.

## System Options

Model Number	Part Number	Reduction Claims	Micron Rating	Capacity gal. (lit.)	Service Flow Rate	Application	Replacement Cartridge	Qty	Sizing
Model 2-2H	55837-03	Sediment, Chlorine	1	20,000 (75,708)	3 gpm (11.4 lpm)	Standard Water	CFS8504-B	1	Medium Volume
							CFS8112	2	
Model 2C-2H	55837-09	Sediment, Chlorine, Cyst	0.5	18,000 (68,137)		Cyst	CFS8504-B	1	
							CFS8812X	2	
Model 2P-2H	55837-10	Sediment, Chlorine	5	9,600 (36,340)		High Turbidity	CFS8504-B	1	Low Volume
							CFS8720	2	

## Limited 5 Year Warranty

CUNO Incorporated warrants to the original purchaser-consumer that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase by the consumer. This warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO. This warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

## Service Worldwide

**China**  
 CUNO Filtration Shanghai Co. Ltd.  
 No. 2 Plant East Side  
 Xin Miao San Road  
 XinQiao Town SongJiang District  
 Shanghai, China 201612

**Australia**  
 CUNO Pacific Pty Ltd.  
 140 Sunnholt Road  
 Blacktown, N.S.W. 2148  
 Australia

**Europe**  
 CUNO Limited  
 21 Woking Business Park  
 Albert Drive  
 Woking, Surrey  
 GU21 5JY, England



**Japan**  
 CUNO K.K.  
 Hodogaya Station Building 6F  
 1-7, Iwai-Cho, Hodogaya-Ku  
 Yokohama 240-0023, Japan

**Brazil**  
 CUNO Latina Ltda  
 Rua AMF do Brazil - 251  
 18120 Mairinque-SP, Brazil

**Singapore**  
 CUNO Filtration Asia Pte Ltd  
 18 Tuas Link 1  
 3rd Floor  
 Singapore 638599

**CUNO Incorporated**  
 400 Research Parkway  
 Meriden, CT 06450, USA  
 Toll Free: 1-888-218-CUNO  
 Worldwide: 203-237-5541  
 Fax: 203-238-8701